97105 Inline
3/2, 5/2 & 5/3 way indirect solenoid operated valves
G 1/4, 1/4 NPT, G 1/2, 1/2 NPT

For single and double operated actuators

Valves for safety systems up to SIL 4 (IEC 61508)

Crossover-free switching, switch-over function guaranteed even with small cross section

Valve switches at power failure into starting position (mechanical return spring, monostable design)


Add-on manual override

Suited for outdoor use under critical environment conditions (see solenoid list)

The solenoid valves are applicable in the protection classes Ex emb, Ex dmb, Ex mb, Ex ia for zones 1 & 2 (gas), 21 & 22 (dust), ATEX cat. II 2GD

International approvals: IEC Ex, FM, CSA others on request





TÜV
DIN EN 61508
IEC 61508
bis SIL 4

Technical features

Medium:
Filtered, non-lubricate and dried compressed air, instrument air, nitrogen and other non-flammable neutral, dry fluids

Operation:
Indirect solenoid operated spool valves

Mounting position:
Optional, impulse valves preferably horizontally

Orifice:
DN 6 mm, DN 8 mm

Port size:
G 1/4, 1/4 NPT, G 1/2, 1/2 NPT

Operating pressure:
2,5 ... 8 bar
with internal air supply
0 ... 8 bar
with external air supply





Operating temperature:
Valve: -40 ... +65°C (NBR),
-25 ... +80°C (HNBR)
(depending on solenoid system)
Solenoid: see solenoid table
Air supply must be dry enough to avoid ice formation at temperatures below +2°C.

Materials:
Housing: stainless steel 1.4404/316, brass 2.0401, Aluminium anodized 3.0615
Seals: NBR (special perbunan) or HNBR




Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.

Technical data




Valves with seals NBR -40 ... +65°C *3), housing: aluminium anodized

Symbol	Port size	Function	Actuation	Operating pressure (bar)	Flow (l/min)	Test certificate IEC 61508 *2)	Weight (kg)	Dimension No.	Model *1)
	G 1/4	3/2	Solenoid/spring	2,5 ... 8 bar	1300	x	0,5	1	9713535
	1/4 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	1300	x	0,5	1	9713545
	G 1/2	3/2	Solenoid/spring	2,5 ... 8 bar	2600		0,5	2	9713555
	1/2 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	2600		0,5	2	9713565
	G 1/4	5/2	Solenoid/spring	2,5 ... 8 bar	1300	x	0,7	3	9710535
	1/4 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	1300	x	0,7	3	9710545
	G 1/2	5/2	Solenoid/spring	2,5 ... 8 bar	2600		0,7	4	9710555
	1/2 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	2600		0,7	4	9710565
	G 1/4	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300		0,7	5	9711535
	1/4 NPT	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300		0,7	5	9711545
	G 1/4	5/3	Solenoid/solenoid, APB	2,5 ... 8 bar	950		0,7	6	9712535
	1/4 NPT	5/3	Solenoid/solenoid, APB	2,5 ... 8 bar	950		0,7	6	9712545

Housing: brass

Symbol	Port size	Function	Actuation	Operating pressure (bar)	Flow (l/min)	Test certificate IEC 61508 *2)	Weight (kg)	Dimension No.	Model *1)
	G 1/4	3/2	Solenoid/spring	2,5 ... 8 bar	1300	x	1,0	1	9713635
	1/4 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	1300	x	1,0	1	9713645
	G 1/2	3/2	Solenoid/spring	2,5 ... 8 bar	2600		1,0	2	9713655
	1/2 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	2600		1,0	2	9713665
	G 1/4	5/2	Solenoid/spring	2,5 ... 8 bar	1300	x	1,7	3	9710635
	1/4 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	1300	x	1,7	3	9710645
	G 1/2	5/2	Solenoid/spring	2,5 ... 8 bar	2600		1,7	4	9710655
	1/2 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	2600		1,7	4	9710665
	G 1/4	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300		1,7	5	9711635
	1/4 NPT	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300		1,7	5	9711645





Housing: stainless steel

Symbol	Port size	Function	Actuation	Operating pressure (bar)	Flow (l/min)	Test certificate IEC 61508 *2)	Weight (kg)	Dimension No.	Model *1)
	G 1/4	3/2	Solenoid/spring	2,5 ... 8 bar	1300	x	1,1	1	9713735
	1/4 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	1300	x	1,1	1	9713745
	G 1/2	3/2	Solenoid/spring	2,5 ... 8 bar	2600		1,1	2	9713755
	1/2 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	2600		1,1	2	9713765
	G 1/4	5/2	Solenoid/spring	2,5 ... 8 bar	1300	x	1,8	3	9710735
	1/4 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	1300	x	1,8	3	9710745
	G 1/2	5/2	Solenoid/spring	2,5 ... 8 bar	2600		1,8	4	9710755
	1/2 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	2600		1,8	4	9710765
	G 1/4	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300		1,8	5	9711735
	1/4 NPT	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300		1,8	5	9711745




*1) When ordering please indicate solenoid, voltage and current type (frequency)
*2) Since May 2008, Date code A8192
*3) For operation in plants according to IEC 61511/61508 -40 ... +40°C see test certificate (on request)
Valve function: APB = All Ports Blocked

Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.




Valves with seals HNBR -25 ... +80°C *3), housing: aluminium anodized

Symbol	Port size	Function	Actuation	Operating pressure (bar)	Flow (l/min)	Test certificate IEC 61508 *2)	Weight (kg)	Dimension No.	Model *1)
	G 1/4	3/2	Solenoid/spring	2,5 ... 8 bar	1300	x	0,5	1	9713235
	1/4 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	1300	x	0,5	1	9713245
	G 1/2	3/2	Solenoid/spring	2,5 ... 8 bar	2600	x	0,5	2	9713255
	1/2 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	2600	x	0,5	2	9713265
	G 1/4	5/2	Solenoid/spring	2,5 ... 8 bar	1300	x	0,7	3	9710235
	1/4 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	1300	x	0,7	3	9710245
	G 1/2	5/2	Solenoid/spring	2,5 ... 8 bar	2600	x	0,7	4	9710255
	1/2 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	2600	x	0,7	4	9710265
	G 1/4	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300		0,7	5	9711235
	1/4 NPT	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300		0,7	5	9711245
	G 1/4	5/3	Solenoid/solenoid, APB	2,5 ... 8 bar	950		0,7	6	9712235
	1/4 NPT	5/3	Solenoid/solenoid, APB	2,5 ... 8 bar	950		0,7	6	9712245

Housing: Brass

Symbol	Port size	Function	Actuation	Operating pressure (bar)	Flow (l/min)	Test certificate IEC 61508 *2)	Weight (kg)	Dimension No.	Model *1)
	G 1/4	3/2	Solenoid/spring	2,5 ... 8 bar	1300	x	1,0	1	9713335
	1/4 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	1300	x	1,0	1	9713345
	G 1/2	3/2	Solenoid/spring	2,5 ... 8 bar	2600	x	1,0	2	9713355
	1/2 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	2600	x	1,0	2	9713365
	G 1/4	5/2	Solenoid/spring	2,5 ... 8 bar	1300	x	1,7	3	9710335
	1/4 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	1300	x	1,7	3	9710345
	G 1/2	5/2	Solenoid/spring	2,5 ... 8 bar	2600	x	1,7	4	9710355
	1/2 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	2600	x	1,7	4	9710365
	G 1/4	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300		1,7	5	9711335
	1/4 NPT	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300		1,7	5	9711345

Housing: Stainless steel

Symbol	Port size	Function	Actuation	Operating pressure (bar)	Flow (l/min)	Test certificate IEC 61508 *2)	Weight (kg)	Dimension No.	Model *1)
	G 1/4	3/2	Solenoid/spring	2,5 ... 8 bar	1300	x	1,1	1	9713435
	1/4 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	1300	x	1,1	1	9713445
	G 1/2	3/2	Solenoid/spring	2,5 ... 8 bar	2600	x	1,1	2	9713455
	1/2 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	2600	x	1,1	2	9713465
	G 1/4	5/2	Solenoid/spring	2,5 ... 8 bar	1300	x	1,8	3	9710435
	1/4 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	1300	x	1,8	3	9710445
	G 1/2	5/2	Solenoid/spring	2,5 ... 8 bar	2600	x	1,8	4	9710455
	1/2 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	2600	x	1,8	4	9710465
	G 1/4	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300		1,8	5	9711435
	1/4 NPT	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300		1,8	5	9711445

*1) When ordering please indicate solenoid, voltage and current type (frequency)
*2) Since May 2008, Date code A8192
*3) For operation in plants according to IEC 61511/61508 -25...+65°C or 0...+80°C see test certificate (on request)
Valve function: APB = All Ports Blocked

Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.

Solenoid operators

	Power consumption 24 V d.c. (W)	230 V a.c. (VA)	Rated current 24 V d.c. (mA)	230 V a.c. (mA)	Ex-Protection (ATEX-Categorie)	Protection class *7)	Temperature Ambient/ Fluid (°C)	Electrical connection	Weight (kg)	Dimension No.	Circuit diagram No.	Model
	1,9	2,1 *5)	78	10		IP00 without connector *5) IP65 with connector *5)	-25 ... +60	DIN EN 175 301-803 Form A	0,3	7	1/5	0763 *7)
	3,6	-	150	-	II2G II2D	Ex mb II T4 *1) Ex tD A21 IP66 T110°	-20 ... +70	3 m Cable	0,4	9	4	0298 *8)
	-	4,6	-	18	II2G II2D	Ex mb II T4 *1) Ex tD A21 IP66 T110°	-20 ... +70	3 m Cable	0,4	9	7	0299 *8)
	0,8	-	33	-	II2G II2D	Ex emb II T5/T6 Ex tD A21 IP66 T130° *2), *10)	-40 ... +80 T5 -40 ... +70 T6 -40 ... +80	M20 X 1,5 *6)	0,6	10	4	4200 *8)
	-	1,3	-	6	II2G II2D	Ex emb II T5/T6 Ex tD A21 IP66 T130° *2), *10	-40 ... +80 T5 -40 ... +70 T6 -40 ... +80	M20 X 1,5 *6)	0,6	10	7	4201 *8)
	0,8	-	33	-	II2G II2D	Ex dmb IIC T5/T6 Ex emb II T5/T6 Ex tD A21 IP66 T130° *3)	-40 ... +80 T5 -40 ... +70 T6 -40 ... +80	1/2 NPT *6)	0,8	17	4	4600 *8)
	0,8	-	33	-	II2G II2D	Ex dmb IIC T5/T6 Ex emb II T5/T6 Ex tD A21 IP66 T130° *3)	-40 ... +80 T5 -40 ... +70 T6 -40 ... +80	M20 X 1,5 *6)		17	4	4602 *8)
	-	1,3	-	6	II2G II2D	Ex dmb IIC T5/T6 Ex emb II T5/T6 Ex tD A21 IP66 T130° *3)	-40 ... +80 T5 -40 ... +70 T6 -40 ... +80	1/2 NPT *6)	0,8	17	7	4601 *8)
	-	1,3	-	6	II2G II2D	Ex dmb IIC T5/T6 Ex emb II T5/T6 Ex tD A21 IP66 T130° *3)	-40 ... +80 T5 -40 ... +70 T6 -40 ... +80	M20 X 1,5 *6)	0,8	17	7	4603 *8)
Stainless steel 	0,8	–	33	–	II2G II2D	Ex mb d IIC T4/T6 Ex mb e II T4/T6 Ex tD A21 IP66 T100° *2), *10)	-40 ... +50 T4 -40 ... +40 T6 -40 ... +80	M20 X 1,5 *6)	1,2	19	4	4802 *8), *11)
	1,3	–	6	II2G II2D	Ex mb d IIC T4/T6 Ex mb e II T4/T6 Ex tD A21 IP66 T100° *2), *10)	-40 ... +50 T4 -40 ... +40 T6 -40 ... +80	M20 X 1,5 *6)	1,2	19	7	4803 *8), *11)
	1,4	-	59	-		XP/DIP, Div. 1 & 2 Cl. I, Gr. A-D Cl. II / III, Gr. E-G T3 (160°C) *4) NEMA 4, 4X, 6, 6P, 7, 9	-20 ... +60	Flying leads 450 mm long	0,4	18	1	3720

Standard voltages 24 V d.c., 230 V a.c., other voltages on request.
Design according to VDE 0580, EN 50014/50028. 100% duty cycle.

*1) EG-Type-Examination-Certificate KEMA 02 ATEX 1347 X
*2) EG-Type-Examination-Certificate KEMA 98 ATEX 4452 X
*3) EG-Type-Examination-Certificate PTB 02 ATEX 2085 X
*4) CSA-LR 57643-6, FM Approval
*5) Required connector: type 0570275
*6) Connector cable gland not supplied, see table »Accessories«
*7) IP-Protection class according to EN60529
*8) Suitable for outdoor installation
*10) IEC Ex Certificate of Conformity
*11) EG-Type-Examination-Certificate PTB 06 ATEX 2054 X

Attention:
The protection class for coil series 46xx and 48xx is determined by the choice of cable gland.
Example: if an ATEX-certified cable gland is used that has Ex d type of protection, the solenoid will have the protection class Ex dmb; if a cable gland with Ex e type of proteciton is used, the solenoid will have protection class Ex emb.

Solenoid actuators for intrinsically-safe circuits





	Nominal resistance RN coil ?<)	Min. required switching current (mA)	Resistance Rw 60 coil * (Ω)	Required voltage at terminal Rw 60 (V)	Protection class	Temperature Ambient/Fluid (°C)	Weight (kg)	Dimension No.	Circuit diagram No.	Model
	200	33	240	8	Ex ia IIC T6	-40 ... +60	0,85	6	10	2050
	391	24	460	11	Ex ia IIC T4	-40 ... +80	0,85	6	10	2051
	736	17	880	15	Ex iaD 21 T80°C	-40 ... +60	0,85	6	10	2052
	1220	13	1460	19	Ex iaD 21 T100°C	-40 ... +80	0,85	6	10	2053

EG-Type-Examination-Certificate PTB 07 ATEX 2019 (Kat. II 2 GD)
IECEx Certificate of Conformity IECEx PTB 07.0017
Cable gland is included in delivery




When selecting an intrinsically safe power supply, the permissible maximum values according to the Certificate of Conformity should be taken into acount.
Ui = 45 V, Ii = 500 mA, according to Tab. A. 1, EN 60079-11
Pi = 2,0 W, Li and Ci can be ignored.

Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.




Valves, indirect solenoid operated using low-power pilot system in protection class Ex ia IIC T4/T6, seals NBR -40 ... +65° C, housing: aluminium anodized, suitable solenoid operators see page 7 only

Symbol	Port size	Function	Actuation	Operating pressure (bar)	Flow (l/min)	Weight (kg)	Dimension No.	Model *1)
	G 1/4	3/2	Solenoid/spring	2,5 ... 8	1300	0,5	7	9713539
	1/4 NPT	3/2	Solenoid/spring	2,5 ... 8	1300	0,5	7	9713549
	G 1/2	3/2	Solenoid/spring	2,5 ... 8	2600	0,5	8	9713559
	1/2 NPT	3/2	Solenoid/spring	2,5 ... 8	2600	0,5	8	9713569
	G 1/4	5/2	Solenoid/spring	2,5 ... 8	1300	0,7	9	9710539
	1/4 NPT	5/2	Solenoid/spring	2,5 ... 8	1300	0,7	9	9710549
	G 1/2	5/2	Solenoid/spring	2,5 ... 8	2600	0,7	10	9710559
	1/2 NPT	5/2	Solenoid/spring	2,5 ... 8	2600	0,7	10	9710569
	G 1/4	5/2	Solenoid/solenoid	2,5 ... 8	1300	0,7	11	9711539
	1/4 NPT	5/2	Solenoid/solenoid	2,5 ... 8	1300	0,7	11	9711549
	G 1/4	5/3	Solenoid/solenoid, APB	2,5 ... 8	950	0,7	12	9712539
	1/4 NPT	5/3	Solenoid/solenoid, APB	2,5 ... 8	950	0,7	12	9712549

Housing: Brass

Symbol	Port size	Function	Actuation	Operating pressure (bar)	Flow (l/min)	Weight (kg)	Dimension No.	Model *1)
	G 1/4	3/2	Solenoid/spring	2,5 ... 8 bar	1300	1,0	7	9713639
	1/4 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	1300	1,0	7	9713649
	G 1/2	3/2	Solenoid/spring	2,5 ... 8 bar	2600	1,0	8	9713659
	1/2 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	2600	1,0	8	9713669
	G 1/4	5/2	Solenoid/spring	2,5 ... 8 bar	1300	1,7	9	9710639
	1/4 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	1300	1,7	9	9710649
	G 1/2	5/2	Solenoid/spring	2,5 ... 8 bar	2600	1,7	10	9710659
	1/2 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	2600	1,7	10	9710669
	G 1/4	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300	1,7	11	9711639
	1/4 NPT	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300	1,7	11	9711649





Housing: Stainless steel

Symbol	Port size	Function	Actuation	Operating pressure (bar)	Flow (l/min)	Weight (kg)	Dimension No.	Model *1)
	G 1/4	3/2	Solenoid/spring	2,5 ... 8 bar	1300	1,1	**7**	9713739
	1/4 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	1300	1,1	**7**	9713749
	G 1/2	3/2	Solenoid/spring	2,5 ... 8 bar	2600	1,1	**8**	9713759
	1/2 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	2600	1,1	**8**	9713769
	G 1/4	5/2	Solenoid/spring	2,5 ... 8 bar	1300	1,8	**9**	9710739
	1/4 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	1300	1,8	**9**	9710749
	G 1/2	5/2	Solenoid/spring	2,5 ... 8 bar	2600	1,8	**10**	9710759
	1/2 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	2600	1,8	**10**	9710769
	G 1/4	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300	1,8	**11**	9711739
	1/4 NPT	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300	1,8	**11**	9711749




*1) When ordering please indicate solenoid, voltage and electrical connection, see page 7
Valve function: APB = All Ports Blocked

Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.




Valves, Indirect solenoid actuated using low-power pilot system in protection class Ex ia IIC T4/T6, seals HNBR -25 ... +80°C, housing: aluminium anodized, suitable solenoid operators see page 7 only

Symbol	Port size	Function	Actuation	Operating pressure (bar)	Flow (l/min)	Weight (kg)	Dimension No.	Model *1)
	G 1/4	3/2	Solenoid/spring	2,5 ... 8	1300	0,5	7	9713239
	1/4 NPT	3/2	Solenoid/spring	2,5 ... 8	1300	0,5	7	9713249
	G 1/2	3/2	Solenoid/spring	2,5 ... 8	2600	0,5	8	9713259
	1/2 NPT	3/2	Solenoid/spring	2,5 ... 8	2600	0,5	8	9713269
	G 1/4	5/2	Solenoid/spring	2,5 ... 8	1300	0,7	9	9710239
	1/4 NPT	5/2	Solenoid/spring	2,5 ... 8	1300	0,7	9	9710249
	G 1/2	5/2	Solenoid/spring	2,5 ... 8	2600	0,7	10	9710259
	1/2 NPT	5/2	Solenoid/spring	2,5 ... 8	2600	0,7	10	9710269
	G 1/4	5/2	Solenoid/solenoid	2,5 ... 8	1300	0,7	11	9711239
	1/4 NPT	5/2	Solenoid/solenoid	2,5 ... 8	1300	0,7	11	9711249
	G 1/4	5/3	Solenoid/solenoid, APB	2,5 ... 8	950	0,7	12	9712239
	1/4 NPT	5/3	Solenoid/solenoid, APB	2,5 ... 8	950	0,7	12	9712249

Housing: brass

Symbol	Port size	Function	Actuation	Operating pressure (bar)	Flow (l/min)	Weight (kg)	Dimension No.	Model *1)
	G 1/4	3/2	Solenoid/spring	2,5 ... 8 bar	1300	1,0	7	9713339
	1/4 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	1300	1,0	7	9713349
	G 1/2	3/2	Solenoid/spring	2,5 ... 8 bar	2600	1,0	8	9713359
	1/2 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	2600	1,0	8	9713369
	G 1/4	5/2	Solenoid/spring	2,5 ... 8 bar	1300	1,7	9	9710339
	1/4 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	1300	1,7	9	9710349
	G 1/2	5/2	Solenoid/spring	2,5 ... 8 bar	2600	1,7	10	9710359
	1/2 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	2600	1,7	10	9710369
	G 1/4	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300	1,7	11	9711339
	1/4 NPT	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300	1,7	11	9711349

Housing: stainless steel

Symbol	Port size	Function	Actuation	Operating pressure (bar)	Flow (l/min)	Weight (kg)	Dimension No.	Model *1)
	G 1/4	3/2	Solenoid/spring	2,5 ... 8 bar	1300	1,1	7	9713439
	1/4 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	1300	1,1	7	9713449
	G 1/2	3/2	Solenoid/spring	2,5 ... 8 bar	2600	1,1	8	9713459
	1/2 NPT	3/2	Solenoid/spring	2,5 ... 8 bar	2600	1,1	8	9713469
	G 1/4	5/2	Solenoid/spring	2,5 ... 8 bar	1300	1,8	9	9710439
	1/4 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	1300	1,8	9	9710449
	G 1/2	5/2	Solenoid/spring	2,5 ... 8 bar	2600	1,8	10	9710459
	1/2 NPT	5/2	Solenoid/spring	2,5 ... 8 bar	2600	1,8	10	9710469
	G 1/4	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300	1,8	11	9711439
	1/4 NPT	5/2	Solenoid/solenoid	2,5 ... 8 bar	1300	1,8	11	9711449

*1) When ordering please indicate solenoid, voltage and electrical connection, see page 7
Valve function: APB = All Ports Blocked

Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.

Low-power pilot system in protection class Ex ia IIC T4/T6
Suitable valves see page 2 only

	Power P (+20°C)	Switch-on voltage U on (+20°C)	Switch-on voltage U on (+80°C)	Switch-off voltage U off (+20°C)	Switch-off voltage U off (-25°C)	Rated current I on	Resistance coil R (+20°C)	Protection class *4)	Temperature Ambient	Circuit diagram No.	Model
	6,3 mW	≥ 4,3 V	≥ 5,2 V	≤ 1,44 V	≤ 1,2 V	≥ 1,45 mA	2800 Ω	Ex ia IIC T4	-40 bis +80°C	11	2085
	23,2 mW	≥ 16 V	≤ 16,8 V	≤ 5,4 V	≤ 4,7 V	≥ 1,45 mA	10900 Ω	Ex ia IIC T6	-40 bis +60°C	11	2086

Max. values Ex i

Ui (V)	Ii (mA)	Pi *5) (mW)
25	150	250
27	125	250
28	115	250
30	100	250
32	85	250

*4) Category II2G, EG-Type-Examination-Certificate PTB 06 ATEX 2001U
Air consumption: home position ⩽ 60 l/h, operating position ⩽ 15 l/h
*5) Model 2086 without Pi limiting. Ci and Li can be ignored.

Ordering example

9802509.	2085.	005.	00
Valve	Pilot 6,3 mW	Electrical connection	00 internal air supply
		005 M16 x 1,5 cable gland	0Z external air supply

Option selector

971★★★★.★★★★.★★★.★★

Function	Substitute
5/2 way valve with spring return	0
5/2 way impuls	1
5/3 way valve with spring return (APB)	2
3/2 way valve with spring return	3
Materials: Housing/Seals	**Substitute**
Aluminium/HNBR (-25...+ 80°C)*	2
Brass/HNBR (-25...+ 80°C)*	3
Stainless steel/HNBR (-25...+ 80°C)*	4
Aluminium/NBR (-40...+ 65°C)*	5
Brass/NBR (-40...+ 65°C)*	6
Stainless steel/NBR (-40...+ 65°C)*	7
Port size	**Substitute**
G 1/4	3
1/4 NPT	4
G 1/2	5
1/2 NPT	6

Air supply	Substitute
Internal	0
External	Z
Voltage	**Substitute**
24 V d.c.	024.0
230 V a.c.	230.5
Solenoid	**Substitute**
See solenoid table	
Version	**Substitute**
Without manual override (retrofit)	5
Semi automatic (on request)	7
low power pilot (see page 5 and 6)	9

Ordering example
5/2 directional control valve with spring return,
Port size G 1/4, solenoid in protection class
Ex emb II, 24 V DC
Type: 9710535.4200.024.00
internal air supply
Type: 9710535.4200.024.0Z
external air supply
II2GD Ex e cable gland M20x1,5
Type: 0588819

Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.

Accessories

Cable gland
Protection class Ex e, Ex d (ATEX),
Nickel plated brass/stainless steel



Page 14

Thread	Cable Ø	Material	Protection class (ATEX)	Model
M 20x1,5	5,0...8,0 mm	Nickel plated brass	II2GD Ex e	0588819
M 20x1,5	10...14 mm	Nickel plated brass	II2GD Ex d	0588851
1/2-14-NPT	7,5...11,9 mm	Nickel plated brass	II2GD Ex d, Ex e	0588925
M 20x1,5	9,0...13 mm	Stainless steel 1.4571	II2GD Ex e	0589385
M 20x1,5	7,0...12 mm	Stainless steel 1.4404	II2GD Ex d	0589395
M 20x1,5	10...14 mm	Stainless steel 1.4404	II2GD Ex d	0589387

Connector	Silencer *1)	Exhaust guard *2)	Manual override)
			
	Page 14	Page 14	
0570275	M/S2 (G1/4)	0613422 (G1/4, 1/4 NPT)	0553886 (without detent)
0663303 (with rectifier)	C/S2 (1/4 NPT)	0613423 (G1/2, 1/2 NPT)	0553887 (with detent)
	M/S4 (G1/2)		
	C/S4 (1/2 NPT)		

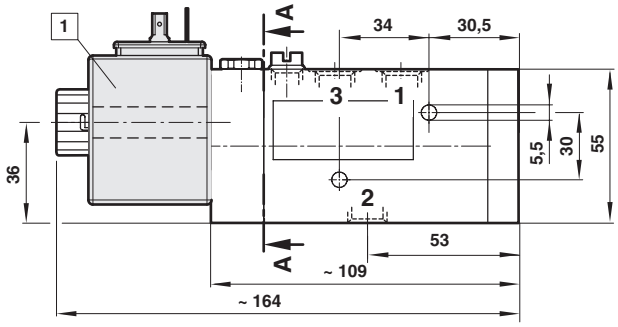
*1) For indoors use only
*2) For outdoors use

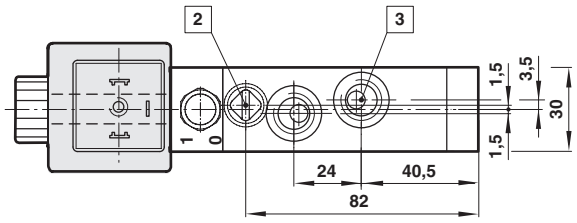
Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.

Dimensions


Valves


1







2

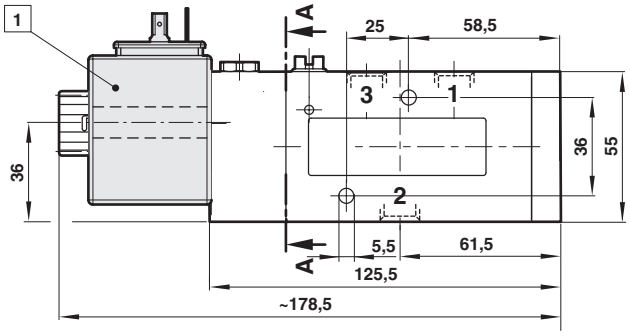

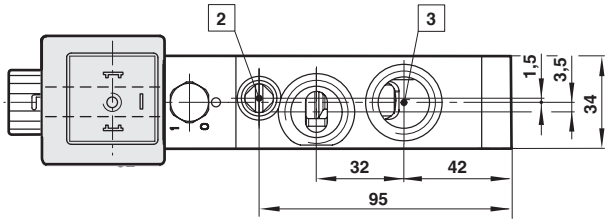



3

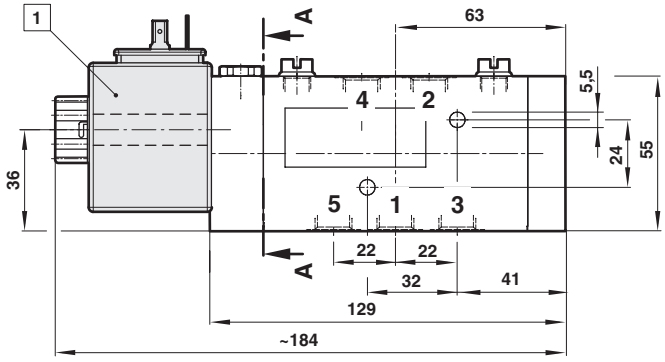

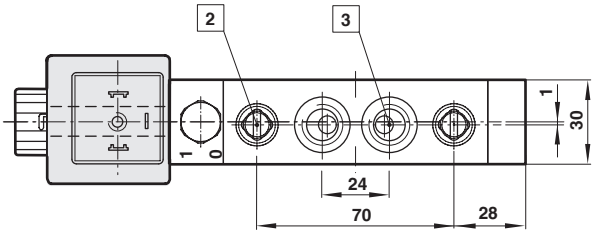


4

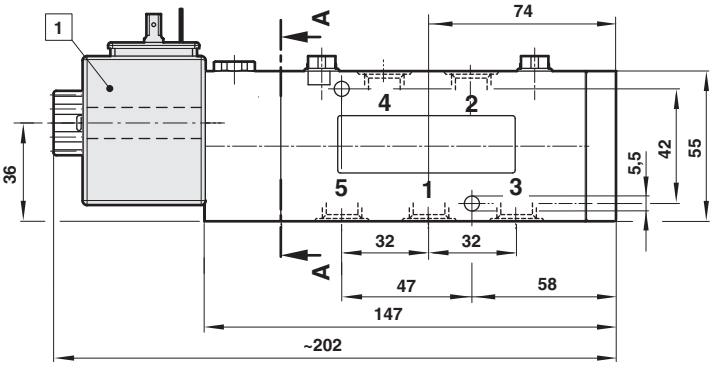

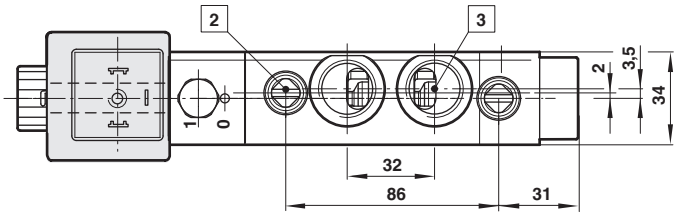

A - A



1 Solenoid dimensions see page 13

2 External control pressure connection G1/8, 1/8 NPT

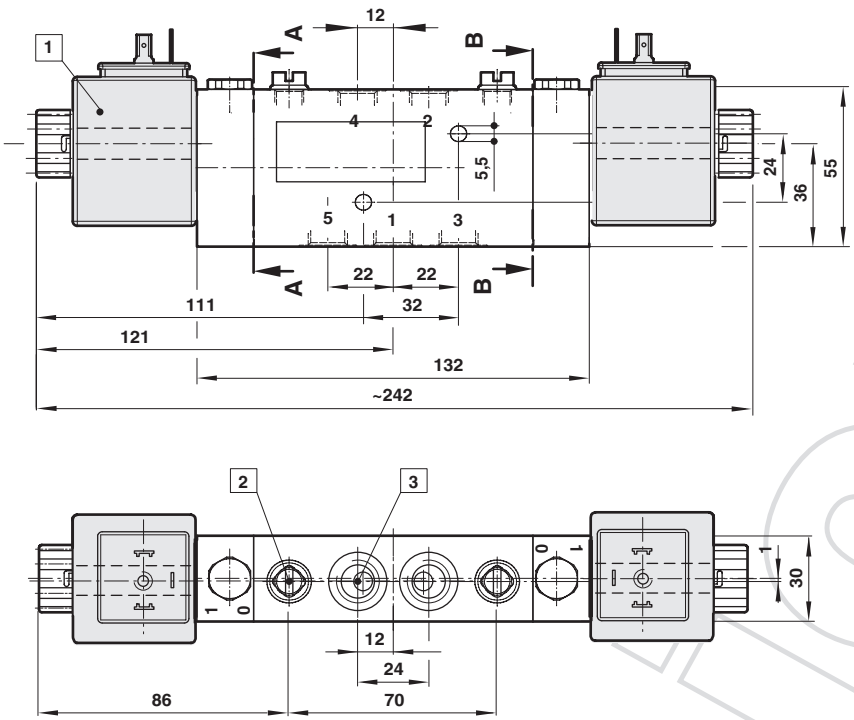
3 Working port G1/4, G1/2 or 1/4 NPT, 1/2 NPT

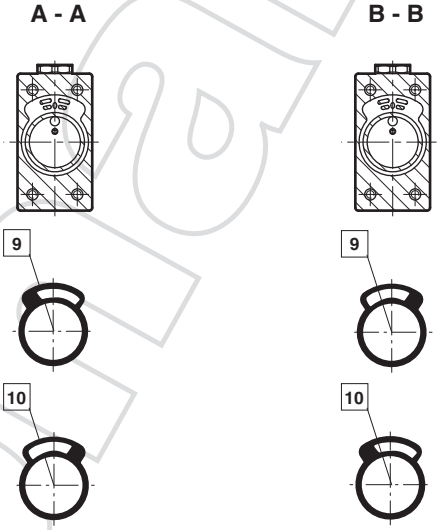
9 Position of gasket internal pilot air

10 Position of gasket external pilot air


Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.


5






6

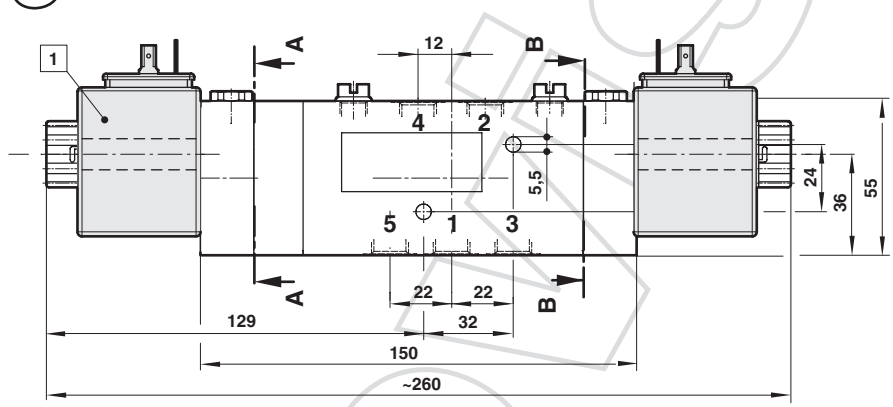

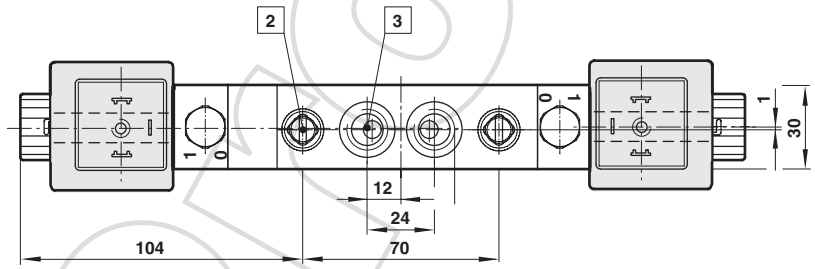

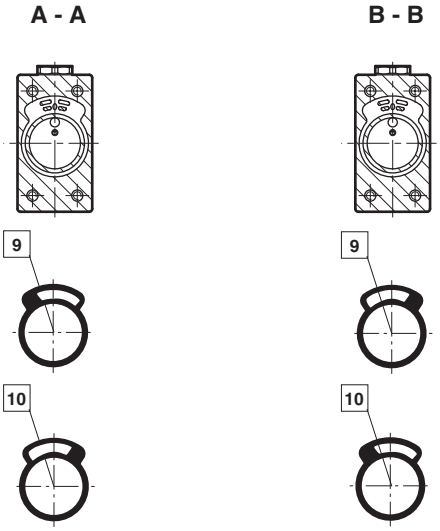

1 Solenoid dimensions see page 13

2 External control pressure connection G1/8, 1/8 NPT

3 Working port G1/4, G1/2 or 1/4 NPT, 1/2 NPT

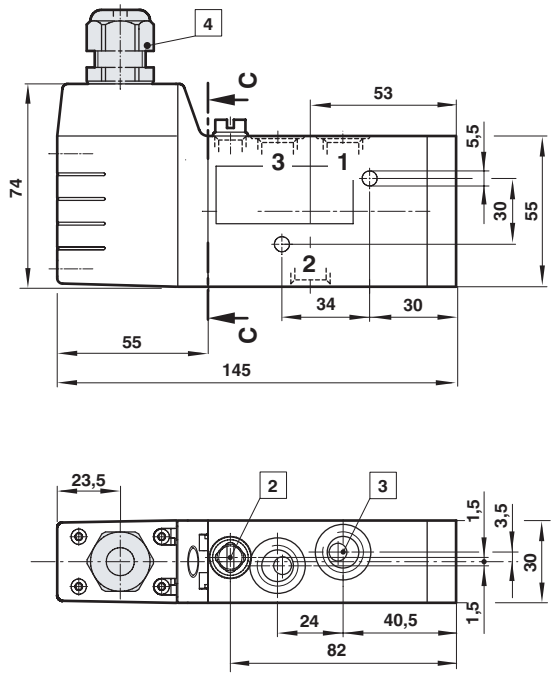
9 Position of gasket internal pilot air

10 Position of gasket external pilot air


PROVISIONAL

Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.


7




8

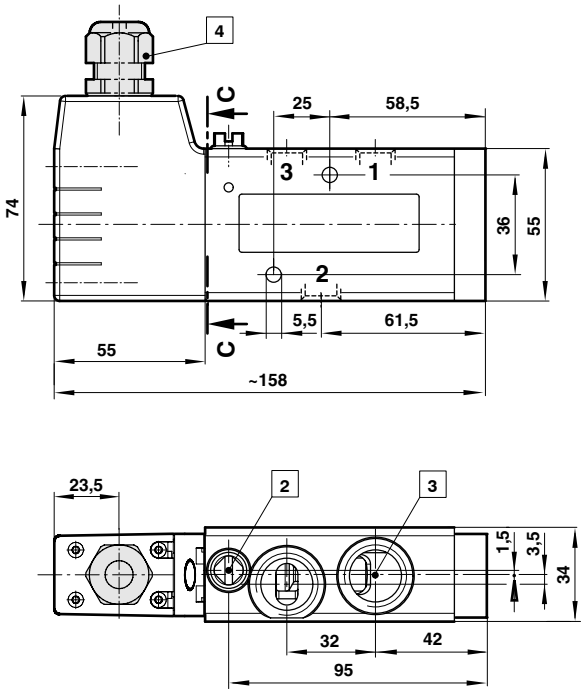

9

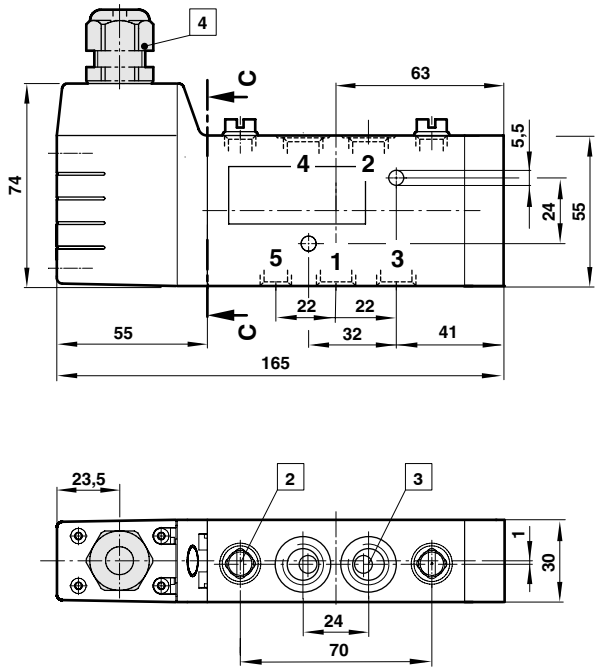


10

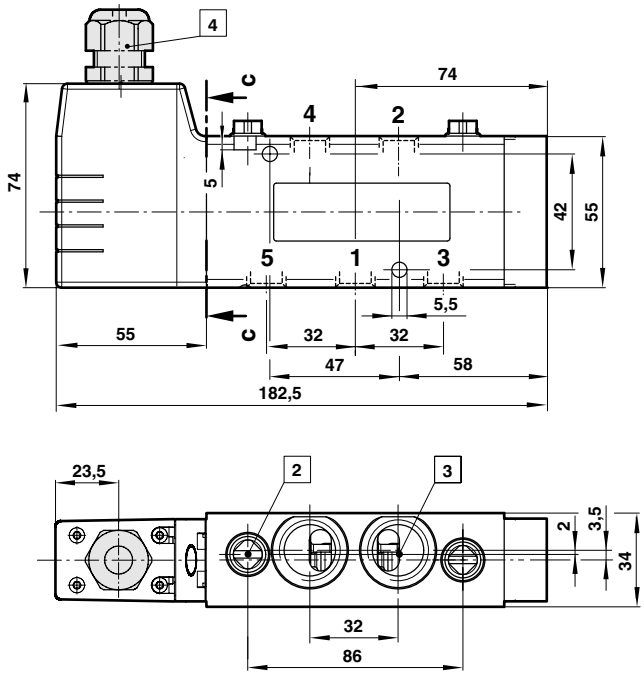

Electrical connection

005



2 External control pressure connection G1/8, 1/8 NPT

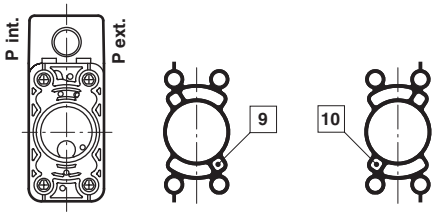
3 Working port G1/4, G1/2 or 1/4 NPT, 1/2 NPT

4 Electrical port M16x1,5

9 Position of gasket internal pilot air


10 Position of gasket external pilot air


C-C




Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.

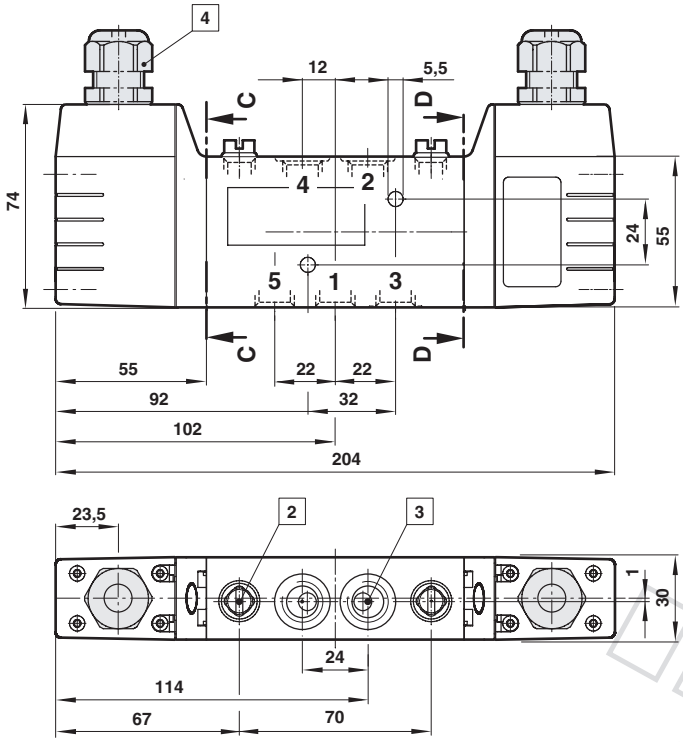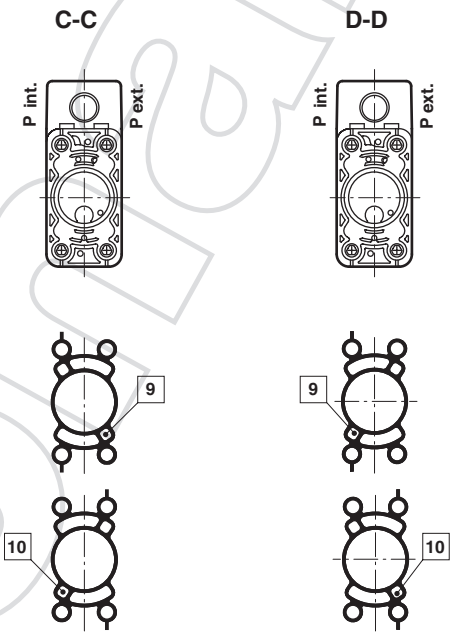
11






12

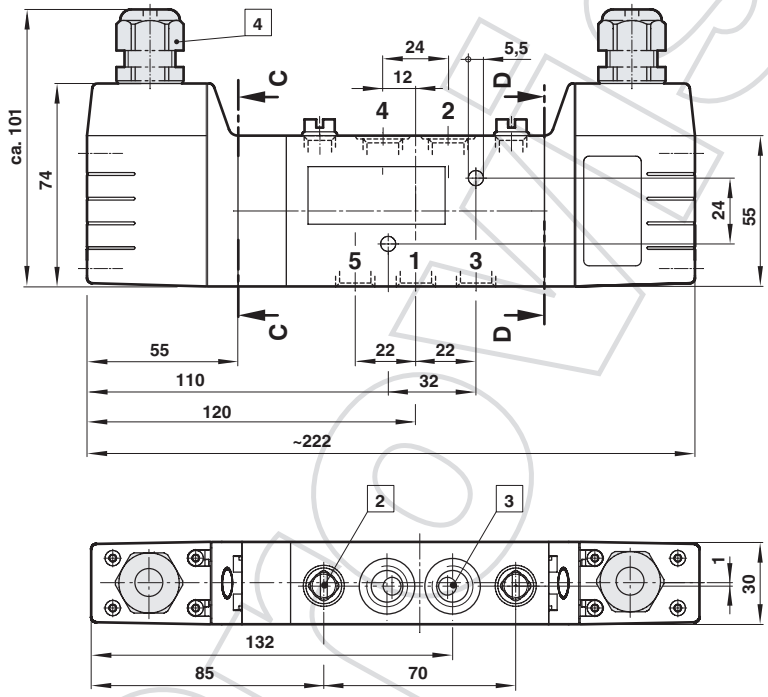

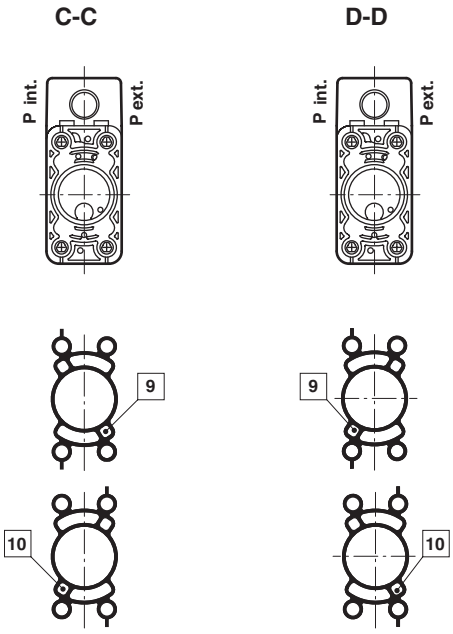

Electrical connection

005



2 External control pressure connection G1/8, 1/8 NPT

3 Working port G1/4, G1/2 or 1/4 NPT, 1/2 NPT

4 Electrical port M16x1,5

9 Position of gasket internal pilot air

10 Position of gasket external pilot air

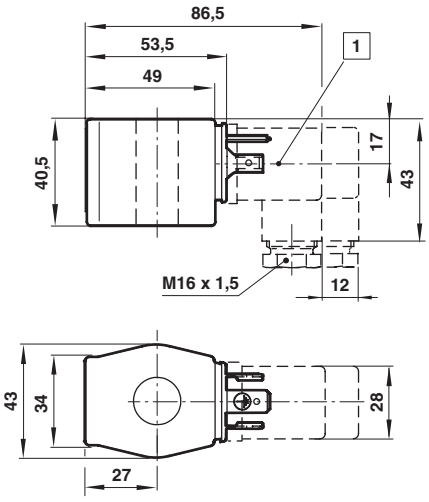
PROVISIONAL

Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.


Dimensions

Solenoid operators


7




9

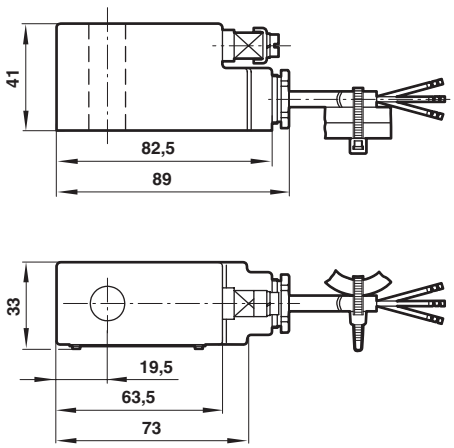


10

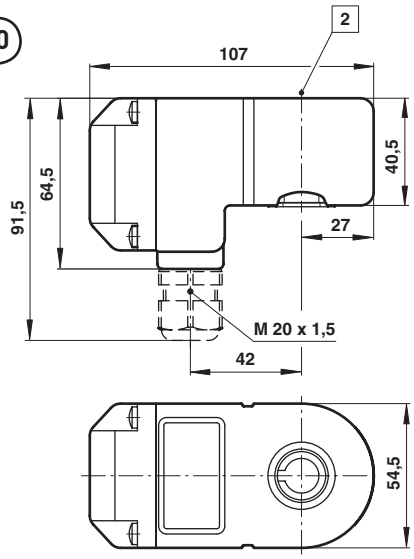


17

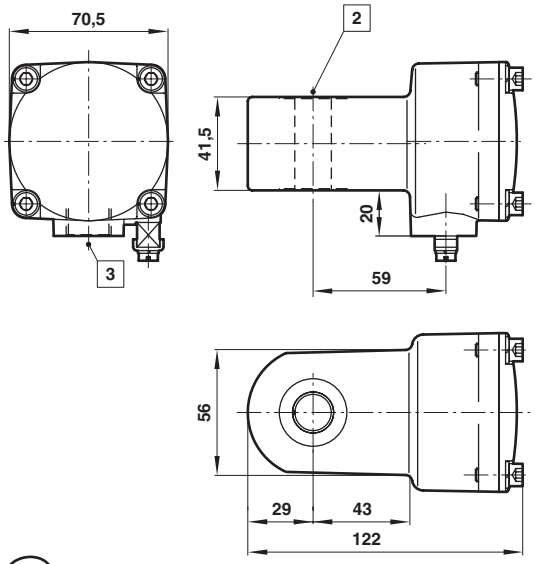

18

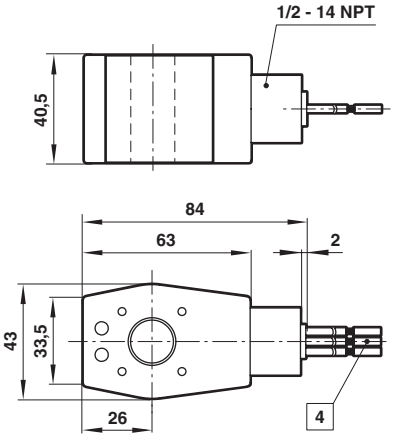

19

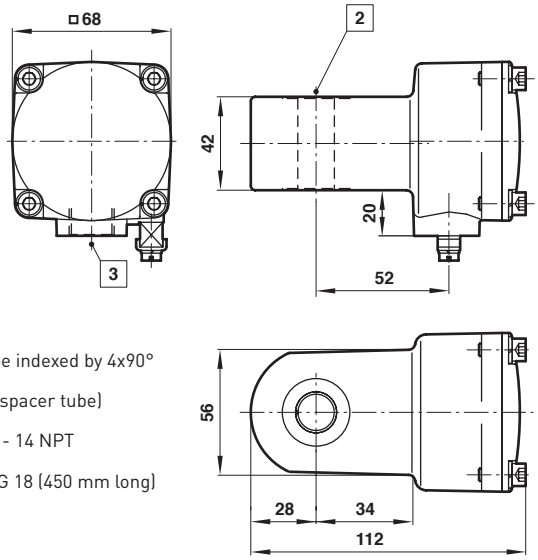

1 Connector can be indexed by 4x90°

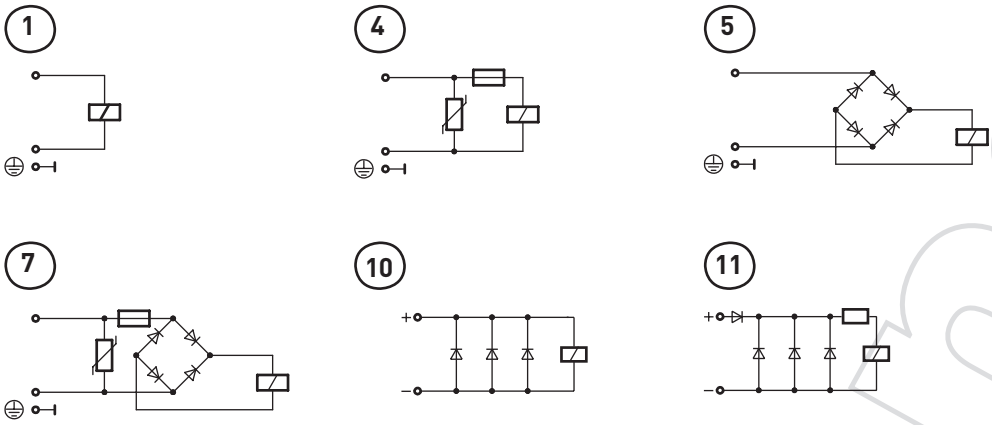
2 Ø 16 or 13 (with spacer tube)

3 M20 x 1,5 or 1/2 - 14 NPT


4 Flying leads AWG 18 (450 mm long)

Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.

Circuit diagrams




Silencer
Model: M/S2, M/S4, C/S2, C/S4

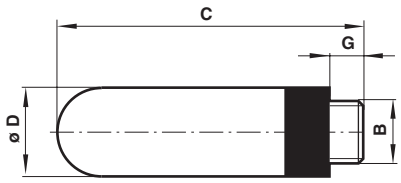


Model	B	G	C	Ø D	Weight (g)	Model
M/S2, C/S2	1/4"	7	35,5	15,5	2,9	0613422
M/S4, C/S4	1/2"	12	67	23	11,5	0613423

Exhaust guard
Model: 0613422, 0613423



B	Suitable for	G	C	Ø D	Weight (g)	Model
1/4"	G1/4, 1/4 NPT	10	26,5	21	5	0613422
1/2"	G1/2, 1/2 NPT	12	33,5	29	11	0613423

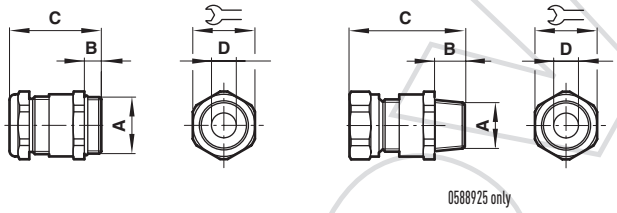Cable gland



0588925 only

A	B	C	ø D		Model
M20 x 1,5	9	36	5 ... 8	22	0588819
M20 x 1,5	6,5	27,5	9 ... 13	22	0589385
M20 x 1,5	14	39	10 ... 14	24	0588851
1/2-14 NPT	15	58	7,5 ... 11,9	24	0588925
M20 x 1,5	14	39	7 ... 12	24	0589395
M20 x 1,5	10	34	10 ... 14	24	0589387

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under **'Technical data'**.
Before using these products with fluids other than those specified, for non-industrial applications, life-support systems, or other applications not within published specifications, consult NORGREN.
Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.
System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.
System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.

Provisional

Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.