


Slide Valves

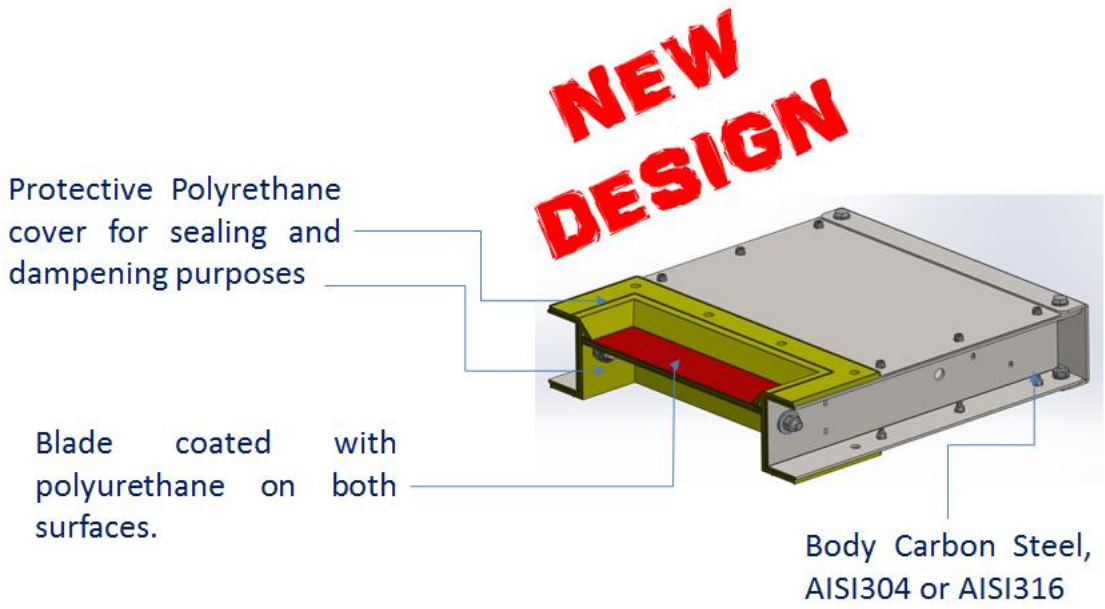

KINETIC FLUIDTRONICS INC.
2357 Osmena Highway Malate,
Sta. Ana, Manila Philippines
Tel # 404-3782/83, 527-1236, 524-5374
Fax # 404-3785 E-mail: kfti@pldtdsl.net
A FLUID CONTROL SOLUTIONS COMPANY

Code Key					
1	2	3	4	5	6
SV	C	150	1	3	B

Blade Material: A = Carbon Steel, B = Stainless Steel, F = Carbon Steel Coated with Polyurethane

Chute Material: 2 = Stainless Steel, 3 = EPDM, 5 = Polyurethane


Body Material: 1 = Carbon Steel, 2 = Stainless Steel

Inlet Size: 150mm, 200mm, 250mm, 300mm, 350mm, 400mm

Inlet Type: C = Round, Q = Square, R = Rectangular


Slide Valve

Square Slide Valve

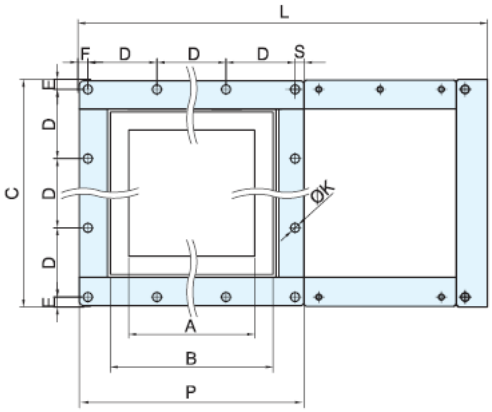


Type	A mm	B mm	C mm	D mm	E mm	F mm	ØK mm	L mm	H mm	P mm	S mm	Bolts	Weight kg
SVQ 150	125	175	261	115	13,5	13,5	12	453	100	261	15,5	M10	15,0
SVQ 200	175	225	311	93,3	13,5	13,5	12	553	100	311	14,1	M10	18,8
SVQ 250	225	275	361	110	15,5	15,5	12	650	100	361	15,5	M10	24,8
SVQ 300	275	325	416	128,3	15,65	23	12	759	100	413	15,1	M10	31,2
SVQ 350	325	375	475	89	15	15	12	903	115	475	18	M10	42,6
SVQ 400	400	415	531	100	13,5	13,5	12	993	115	531	15,5	M10	50,8

Round Slide Valve

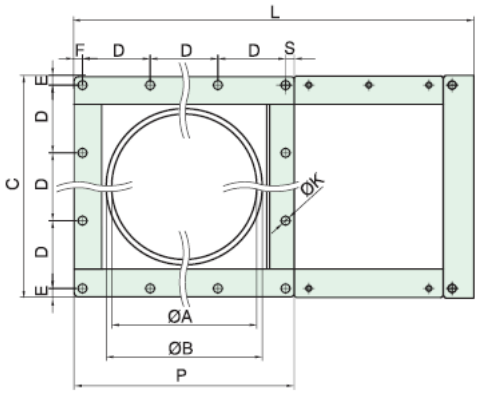

Type	ØA mm	ØB mm	C mm	D mm	E mm	F mm	ØK mm	L mm	H mm	P mm	S mm	Bolts	Weight kg
SVC 150	150	165	261	115	13,5	13,5	12	453	100	261	15,5	M10	14,8
SVC 200	200	215	311	93,3	13,5	13,5	12	553	100	311	14,1	M10	19,4
SVC 250	250	265	361	110	15,5	15,5	12	650	100	361	15,5	M10	25,4
SVC 300	300	315	416	128,3	15,65	23	12	759	100	413	15,1	M10	31,4
SVC 350	350	365	475	89	15	15	12	903	115	475	18	M10	43,0
SVC 400	400	415	531	100	13,5	13,5	12	993	115	531	15,5	M10	51,6


Rectangular Slide Valve

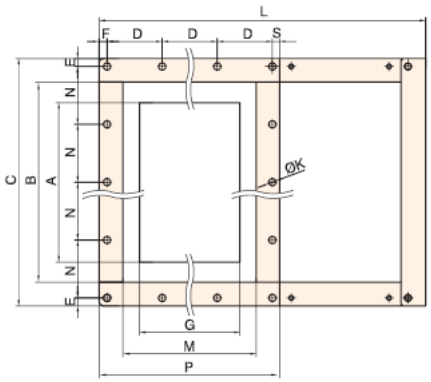

Type	A mm	B mm	C mm	D mm	E mm	F mm	ØK mm	L mm	H mm	G mm	N mm	M mm	P mm	S mm	Bolts	Weight kg
SVR 200	270	336	419	93,3	13,5	13,5	12	553	100	170	98	224,5	307,5	14,1	M10	25,0
SVR 300	428	486	584	128,3	20	20	12	761	100	270	136	325	423	18	M10	42,0

Actuator

Slide valves can be used with manual, pneumatic or electric swivel drive actuators as needed.
Details please refer to Actuator Catalogue.



Manual Actuators		ACMS150	ACMS200	ACMS250	ACMS300	ACMS350	ACMS400
Pneumatic Actuators		ACPS150	ACPS200	ACPS250	ACPS300	ACPS350	ACPS400
Electric Swivel Drive Actuator		ACES150	ACES200	ACES250	ACES300	ACES350	ACES400
Slide Valves	SV Q/C 150	√					
	SV Q/C/R 200		√				
	SV Q/C 250			√			
	SV Q/C/R 300				√		
	SV Q/C 350					√	
	SV Q/C 400						√

No. of Bearings

Size 150mm = 3x2= 6 bearings
Size 200mm = 3x2= 6 bearings
Size 250mm = 3x2= 6 bearings
Size 300mm = 4x2 = 8 bearings
Size 350mm = 5x2 = 10 bearings
Size 400mm = 5x2 = 10 bearings