

Butterfly Valves





KINETIC FLUIDTRONICS INC.
2357 Osmena Highway Malate,
Sta. Ana, Manila Philippines
Tel # 404-3782/83, 527-1236, 524-5374
Fax # 404-3785 E-mail: kfti@pldtdsl.net
A FLUID CONTROL SOLUTIONS COMPANY

Butterfly Valves

OZB butterfly valves are designed as single or double flange types and are supplied with patented o-ring channel and seal for maximum impermeability.

SINGLE FLANGE BUTTERFLY VALVES - designed for use of flexible bellows and similar connections.

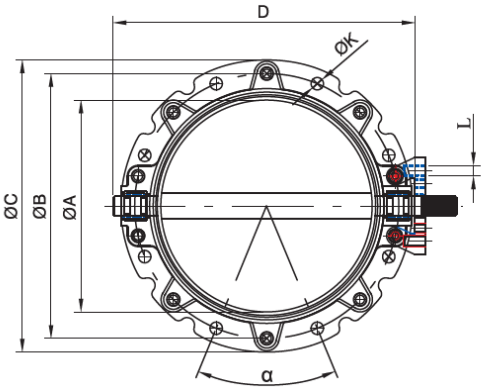









Type	ØA	ØB	ØC	ØD	ØE	F	N	ØK	L	α	Z	Weight
BV1F100	100	180	214	215	105	115	38	14	M12	90⁰	4	4,2kg
BV1F150	150	200	225	250	163	115	40	14	M12	90⁰	4	4,4kg
BV1F200	200	250	278	302	213	115	40	14	M12	90⁰	4	5,8kg
BV1F250	250	300	328	352	263	115	40	14	M12	45⁰	8	7,6kg
BV1F300	300	350	378	402	313	115	40	14	M12	45⁰	8	9,8kg
BV1F350	350	400	436	465	363	124	38	14	M12	45⁰	8	17,2kg
BV1F400	400	470	506	530	413	124	38	14	M12	45⁰	8	22,0kg

DOUBLE FLANGE BUTTERFLY VALVES - have the same upper and lower flanges and are designed to be used in systems that have fixed connection to each other, the maximum working pressure is 0.2 bars and the maximum working temperature is designated as 120 deg C

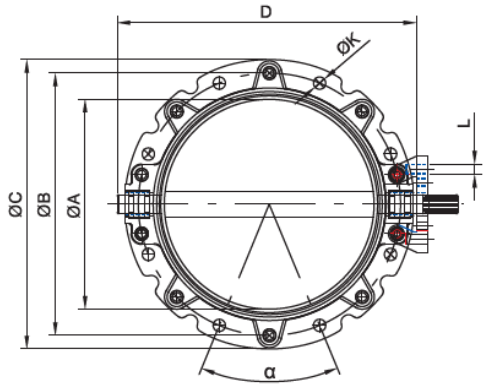





Type	ØA	ØB	ØC	ØD	F	ØK	L	α	Z	Weight
BV2F100	100	180	214	215	77	14	M12	90⁰	4	4,2kg
BV2F150	150	200	225	250	77	14	M12	90⁰	4	4,4kg
BV2F200	200	250	278	302	77	14	M12	90⁰	4	5,6kg
BV2F250	250	300	328	352	77	14	M12	45⁰	8	7,3kg
BV2F300	300	350	378	402	77	14	M12	45⁰	8	9,2kg
BV2F350	350	400	436	465	86	14	M12	45⁰	8	16,8kg
BV2F400	400	470	506	530	86	14	M12	45⁰	8	21,8kg

PNUEMATIC ACTUATOR

ACP13 pneumatic actuator suitable for use with butterfly valves of 100 – 300mm
ACP34 pneumatic actuator suitable for use with butterfly valves of 350 - 400mm


Type	ØA	B	C	D	E	F	G	ØH DIN5482	L	M	N	ØP	Q	ØR	Bolt Ø	Hole Ø	Air Cons. @6bar	kg
ACP13	106	275	130	165	86	61.5	61.5	22x19	11	46	50	12	12	–	1/8"	8x6	4.4 (x2)	4.2
ACP34	160	335	230	120	100	280	250	28x25	60	145	80	13	M10	70	1/4"	8x6	7.1 (x2)	10.6



ACP13



ACP34

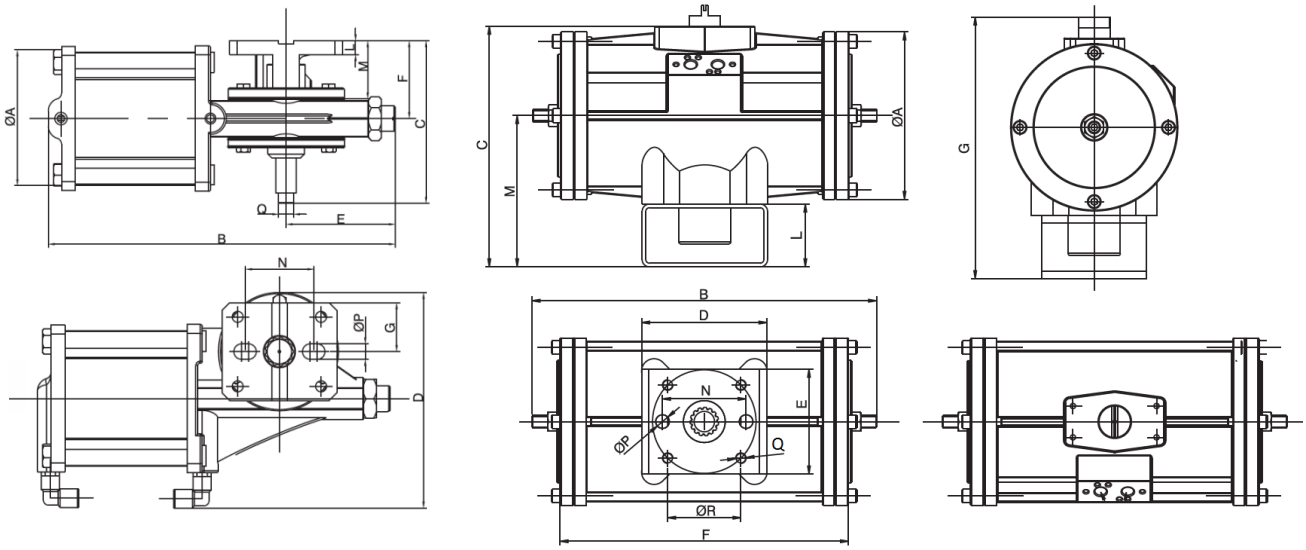

MANUAL ACTUATOR

ACM13 Manual actuator suitable for use with butterfly valves of 100-300mm
ACM34 Manual actuator suitable for use with butterfly valves of 350 - 400mm



ACM13



ACM34

KINETIC FLUIDTRONICS INC.

Website: www.kfti.com.ph

Address: 2357 Osmena Highway Malate, Sta. Ana. Manila Philippines Email: kfti@pldtdsl.net Tel: 404-3782/83 Fax: 404-3785